

BRICKMAN 300 CARDBOARD

BRICKMAN

THIS VERSION OF BRICKMAN 300 IS DESIGNED FOR EFFECTIVE COMPACTION OF LARGE AMOUNTS OF DRY CARDBOARD.

The automated solution is time-saving and convenient. Due to a small footprint and low sound emission, Brickman 300 can be placed indoors close to the source of waste.



Automatic solution



250 K6/H

CAPACITY
CARDBOARD

Orwak benefits

MORE PRODUCTIVE USE OF TIME

Less time spent on waste handling, more time for your core activities!

MORE SPACE & ORDER

Our balers rapidly minimizes the space the waste takes up, keeping aisles free and tidy.

LESS COSTS, MORE VALUE

More compaction = less waste volume to transport. Fewer transports required results in lower transportation costs and reduced CO₂ emissions. Sorting at source yields a higher quality of waste material for recycling.



Why Brickman?

- + Convenient fully automated compaction solution
- + Impressive volume reduction of up to 20:1
- + Placement opportunities indoors



BRICKMAN 300 CARDBOARD

BRICKMAN 300 CARDBOARD IS OPTIMIZED FOR:

CARDBOARD
+ Corrugated
cardboard

CAPACITY
Up to 250 kg/h



DESIGNED FOR CARDBOARD COMPACTION
The model Brickman 300 Cardboard is ideal for compaction of dry cardboard and paper. The compaction pressure is up to 500 kg/cm².

GREAT LOGISTICS

Thanks to Brickman's compact dimensions and low sound emission, it can be placed indoors close to the waste disposal station.

CONVENIENT AND EFFICIENT

Brickman offers time-saving and comfortable waste handling. The press can be fed while running, there is no lid or door to open when loading the material and the ready briquettes require no binding. Furthermore, optional photocells can automate the start function. The material infeed and briquette outfeed are easy to integrate in system solutions.



OPTIONAL ACCESSORIES

Brickman 300 Cardboard can be ordered with a number of accessories; different chute options, start systems, sound absorption plates as well as heating and cooling devices.

DIMENSIONS & SPECIFICATIONS

DIMENSIONS (MM)

| A | B | C | D | E | F | G | H | I | J | K | L | M | N | O | P |
|------|------|------|------|------|-----|------|------|-----|-----|-----|-----|------|-----|-----|------|
| 2270 | 1950 | 1360 | 1500 | 1880 | 850 | 2190 | 3040 | 140 | 950 | 210 | 840 | 1440 | 600 | 825 | 1100 |

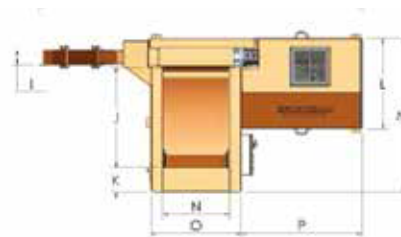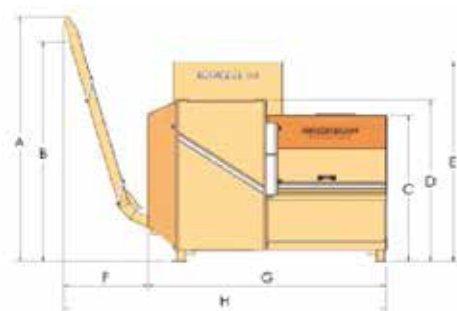

TECHNICAL SPECIFICATIONS

| MACHINE WEIGHT | PRESS FORCE | PRESSURE | HOPPER | BRIQUETTE SIZE | DENSITY | NOISE LEVEL | OPERATING POWER |
|----------------|----------------|------------------------------|---------------------|------------------|-----------------------------|-------------|---------------------------------------------------------------------------------------------------------|
| 1600 kg | 25 ton, 250 kN | Up to 500 kg/cm ² | 0.75 m ² | 80x80x300-100 mm | Up to 600 kg/m ² | 68 db (A) | 400 V, -3phase, 50 Hz** Fuse: 25 A (slow) Engine: 7.5 kW Voltage: 24 V Protec. class: IP 55 |



SiTCO
TOTAL PACKAGING SOLUTIONS

شركة الفصول للتجارة والصناعة الدولية
SEASON INTERNATIONAL TRADING & INDUSTRIES CO.

P.O. Box 886, Manama - Kingdom of Bahrain, Tel: +973 17704647, Fax: +973 17704648
E-mail: info@seasoninternational.net, web: www.seasoninternational.net

