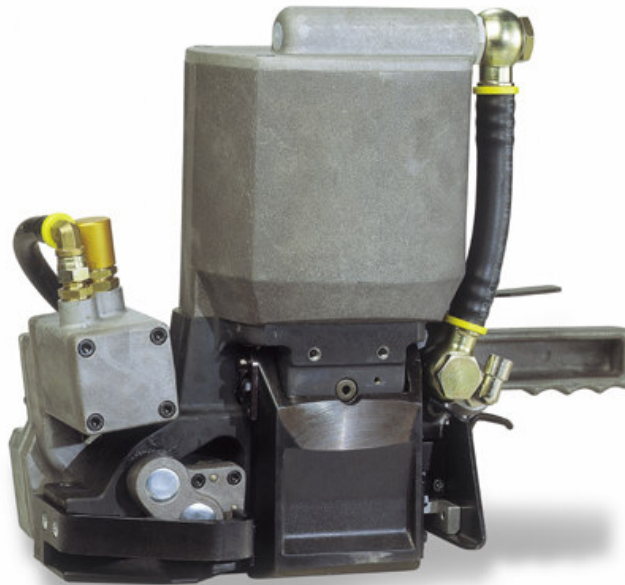

Pneumatic sealless combination steel strapping tool



Characteristics

Strapping qualities:	Uniflex and Ultraflex max. 1100 N/mm ² / 160'000 psi
Strapping dimensions:	widths 19.0 – 32.0 mm / 3/4 – 1 1/4"
	thicknesses 0.63 – 1.30 mm / .025 - .050"
Weights:	23.5 kg / 51.8 lbs without suspension
	24.0 kg / 52.9 lbs with suspension (Standard A38.2401)
Average seal strength:	approx. 80 %
Versions available:	MicroLock™ system
Strap tension:	The tool is available for two different stages for strap tension, see chart
Suspensions (Optional):	Suspension bracket for standard application is supplied with the tool. Three different suspension brackets are available; have to be ordered separately, see accessories

Advantages

- Robust heavy duty strapping machine for flat packages, the perfect tool for high tension applications, designed for demanding applications in a rough environment
- Ruggedly designed high performance strapping tool meeting the requirements of the most demanding applications
- High reliability reduces down time; easy to service
- Easy simultaneous loading of both straps and pneumatic operation increase productivity considerably
- Pneumatic tensioning guarantees even tension of all straps applied
- The sealless joint reduces the overall strapping costs by approx. 10 % through the elimination of the seals
- The MicroLock™ sealless system guarantees a maximum of security of the sealless steel strapping joint against unlocking

Chart of types model A383

Item No.	Model	Strap widths		Thicknesses		Max. Tension		Tension speed	
		mm	inch	mm	inch	N	lbs	mm/s	inch/s
13.6702	A383/19/0.80-0.90/ULT/15.0	19	3/4"	0.80-0.90	.031-.035	15000	3370	95	3.7
13.6710	A383/25/0.80-0.90/10.0	25	1"	0.80-0.90	.031-.035	10000	2250	145	5.7
13.6720	A383/25/0.80-0.90/15.0	25	1"	0.80-0.90	.031-.035	15000	3370	95	3.7
13.6730	A383/25/1.00/UNI/15.0	25	1"	1.00	.040	15000	3370	95	3.7
13.6731	A383/25/1.30/UNI/15.0	25	1"	1.30	.051	15000	3370	95	3.7
13.6739	A383/32/0.63/ULT/10.0	32	1 1/4"	0.63	.025	10000	2250	145	5.7
13.6740	A383/32/0.80-0.90/10.0	32	1 1/4"	0.80-0.90	.031-.035	10000	2250	145	5.7
13.6750	A383/32/0.80-0.90/15.0	32	1 1/4"	0.80-0.90	.031-.035	15000	3370	95	3.7
13.6760	A383/32/1.00/UNI/15.0	32	1 1/4"	1.00	.040	15000	3370	95	3.7

 UNI = Uniflex regular duty strapping max. 850 N/mm² / 12000'3 psi

 ULT = Ultraflex high tensile strapping max. 1100 N/mm² / 0'16000 psi

Chart of types model A383 with MicroLock™

Item No.	Model	Strap widths		Thicknesses		Max. Tension		Tension speed	
		mm	inch	mm	inch	N	lbs	mm/s	inch/s
13.6705	A383/19/0.80-0.90/ULT/10.0/ML	19	3/4"	0.80-0.90	.031-.035	10000	2250	95	3.7
13.6706	A383/19/0.80-0.90/ULT/15.0/ML	19	3/4"	0.80-0.90	.031-.035	15000	3370	95	3.7
13.6715	A383/25/0.80-0.90/10.0/ML	25	1"	0.80-0.90	.031-.035	10000	2250	145	5.7
13.6725	A383/25/0.80-0.90/15.0/ML	25	1"	0.80-0.90	.031-.035	15000	3370	95	3.7
13.6735	A383/25/1.00/UNI/15.0/ML	25	1"	1.00	.040	15000	3370	95	3.7
13.6736	A383/25/1.30/UNI/15.0/ML	25	1"	1.30	.051	15000	3370	95	3.7
13.6745	A383/32/0.63/ULT/10.0/ML	32	1 1/4"	0.63	.025	10000	2250	145	5.7
13.6746	A383/32/0.80-0.90/10.0/ML	32	1 1/4"	0.80-0.90	.031-.035	10000	2250	145	5.7
13.6755	A383/32/0.80-0.90/15.0/ML	32	1 1/4"	0.80-0.90	.031-.035	15000	3370	95	3.7
13.6765	A383/32/1.00/UNI/15.0/ML	32	1 1/4"	1.00	.040	15000	3370	95	3.7

 UNI = Uniflex regular duty strapping max. 850 N/mm² / 12000'3 psi

 ULT = Ultraflex high tensile strapping max. 1100 N/mm² / 0'16000 psi

ML= MicroLock™

Accessories

- A38.2401 Suspension bracket standard (included with tool)
- A38.2404 Suspension bracket vertical
- A38.2407 Suspension bracket horizontal
- A38.2410 Suspension bracket universal (standard, vertical, horizontal very fast changes possible, perfect for frequent changes, with intergrated air supply)


SITCO
 TOTAL PACKAGING SOLUTIONS

شركة الفصول للتجارة والصناعة الدولية

SEASON INTERNATIONAL TRADING & INDUSTRIES CO.

 P.O. Box 886, Manama - Kingdom of Bahrain, Tel: +973 17704647, Fax: +973 17704648
 E-mail: info@seasoninternational.net, web: www.seasoninternational.net