

MH600

**High tension PET friction weld
strapping head**

MH600

All electric high tension PET friction weld strapping head

The MH600 strapping head has been designed for automatic, heavy duty industrial PET strapping installations. The head processes strapping from 13 - 19 mm (1/2 - 3/4") of various thicknesses and qualities. The high strap tension feature (up to 7000 N / 1545 lbs) allows applications of PET strapping with break strengths up to 15000N (3300 lbs).

Features



- Compact and modular design
- One piece of aluminum cast housing
- High strap tension up to 7000N (1545 lbs), electronically adjustable
- Wide strap width range without changing parts
- Strap guide open feature
- Well proven separate feeding, tensioning and friction weld sealing systems
- High consistent seal efficiency because of environment temperature monitoring
- Long life and maintenance friendly, resulting in high availability
- 3 side suspension point for easy integration

Technical Data

Strapping Widths: 13 - 19 mm / 1/2 - 3/4"
 Thicknesses: 0.64 - 1.53 mm / 0.025 - 0.060"
 Quality: PET
 Pack width: min. 250 mm / 10"
 Seal joint: Friction weld
 Seal efficiency: up to 80%
 Strap tension: 2500N / 7000N adjustable
 (560 lbs / 1570 lbs)
 Feed/retract speed: 5.3 m/s / 17.3 ft./s
 Tension speed: 105 mm/s / 0.34 ft./s
 Power supply: 230V - 3PE /50Hz
 Consumption: 1.1KW
 Control voltage: 24V DC
 Weight: 115 kg / 253 lbs

Options

- Headsuspension with power floating system
- Mechanical pack height sensor
- Thinner or rubber coated base protection plate
- S trap guide arch systems
- S trap dispensers
- Control
- Complete custom built strapping machines
- Dust cleaning system
- Counter

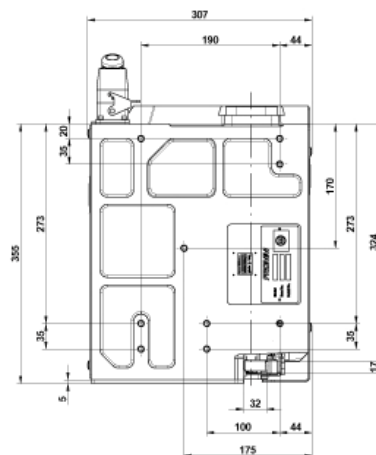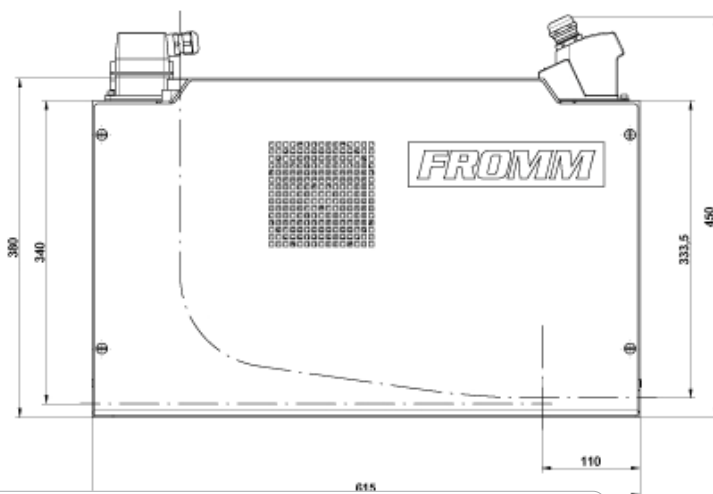

SiTCO
TOTAL PACKAGING SOLUTIONS

شركة الفصول للتجارة والصناعة الدولية

SEASON INTERNATIONAL TRADING & INDUSTRIES CO.

P.O. Box 886, Manama - Kingdom of Bahrain, Tel: +973 17704647, Fax: +973 17704648
 E-mail: info@seasoninternational.net, web: www.seasoninternational.net